

# PE142

TRUCK MOUNTED ARTICULATED PLATFORMS

## STANDARD FEATURES

### Performance



- 70000V Insulated Fiberglass Basket
- Lighting on Basket
- Engine Start/Stop System (Vehicle dependent)
- Hydro mechanical Control System
- Platform Control Panel on Basket and Base
- Rotating Beacon on Turret
- All-terrain Outrigger Swivels
- Non-slip Body
- Toolbox (2 pieces)

### Safety

- TS-EN 280 + A1 / CE Conformity
- Emergency Bypass® System
- Emergency Stop Buttons on Control Panels
- Pressure Holding Valves and Interlocking Valves against hose blasts
- High Pressure Relief Valve
- Emergency Descend Hand Pump

## OPTIONAL FEATURES

- Fly Boom\*
- Fly Boom Rotation (180° Horizontal)
- Tilt Sensor
- Basket Rotation
- Basket Load Cell
- Extra Basket Capacity
- Aluminium Basket
- Steel Basket
- 110V/220V/380V Socket in Basket
- Toolbox in Basket
- Anemometer on Basket
- Electronic Proportional Joystick Controller
- Automatic One-button Platform Leveling
- Simultaneous Commands Execution (Full proportional)
- Continuous Turret Rotation
- Emergency Descend DC Powerpack
- Operator Seat
- Operator Cabin
- Nonslip Aluminium Body
- External AC Powerpack
- Base-Basket Radio Communication
- Custom Paint Color
- Additional Lighting
- Additional Toolboxes (+2)

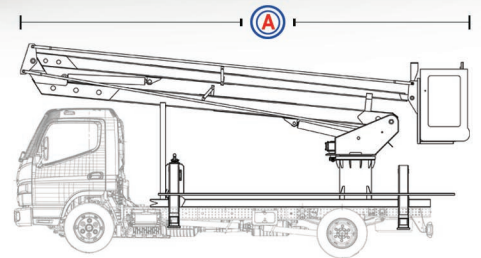

TECHNICAL DATA		PE 142
Operating Height		14 m
Platform Height		12 m
Lateral Outreach		7 m
Turret Rotation		270°
Basket Capacity (kg)		200 kg
Basket Dimensions		750 x1000x1100 mm
(C) Stowed Height		2875 mm
(A) Stowed Length		6875 mm
(B) Stowed Width		2100 mm
Width Outriggers Extended		2580 mm
Control System		Hydro mechanical Control System
Outriggers		A Type
Weight		2050 kg

