

PTE204

TRUCK MOUNTED ARTICULATED TELESCOPIC PLATFORMS

STANDARD FEATURES

Performance

- 70000V Insulated Fiberglass Basket
- Automatic Basket Leveling
- Lighting on Basket
- Engine Start/Stop System (Vehicle dependent)
- Electronic Card Controlled Operation
- Proportional Joystick Controller
- Buzzer
- Basket and Turret Control Panels
- Rotating beacon on Turret
- All-terrain Outrigger Swivels
- Non-slip Body
- Toolbox (2 pieces)

Safety

- TS-EN 280 + A1 / CE Conformity
- Emergency Bypass® System
- Emergency Stop Buttons on Control Panels
- Pressure Holding Valves and Interlocking Valves against Hose Blasts
- High Pressure Relief Valve
- Emergency Descend Hand Pump

OPTIONAL FEATURES

- Simultaneous Commands Execution (Full proportional)
- Automatic One-button Platform Leveling
- Fly Boom*
- Fly Boom Rotation (180° Horizontal)
- Tilt Sensor
- Basket Load Cell
- Extra Basket Capacity
- Basket Rotation
- Anemometer on Basket
- 110V/220V/380V Socket in Basket
- Aluminium Basket
- Steel Basket
- Toolbox in Basket
- Base-Basket Radio Communication
- Continuous Turret Rotation
- Operator Seat
- Operator Cabin
- Hydro mechanical Control System
- Wireless Remote Joystick Controller
- Emergency Descend DC Powerpack
- External AC Powerpack
- Special Paint Color
- Additional Lighting
- Nonslip Aluminium Body
- Additional Toolboxes (+2)





TECHNICAL DATA

**PTE
204**

Operating Height	20 m
Platform Height	18 m
Lateral Outreach	10 m
Turret Rotation	270°
Basket Capacity (kg)	200 kg
Basket Dimensions	750x1000x1100 mm
Stowed Height	3100 mm
Stowed Length	5850 mm
Stowed Width	2100 mm
Width Outriggers Extended	Electronic Proportional Joystick
Weight	3500 kg

(A)
(C)
(B)

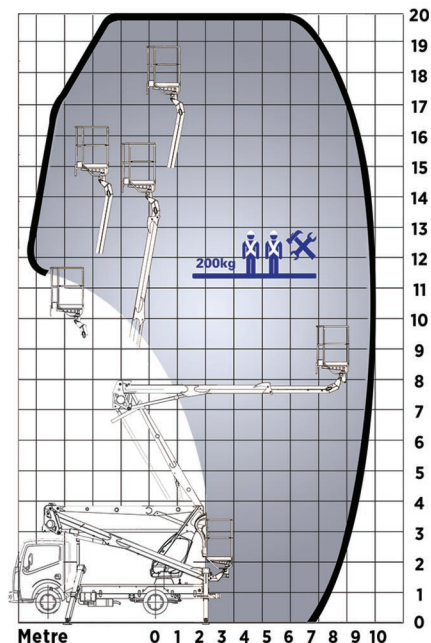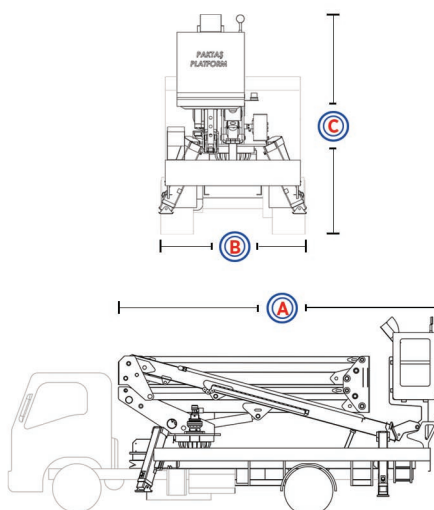

Technical specifications may change depending on vehicle.
All technical specifications are subject to change without notice.
*Changes operating height.