

PTY 213F

SELF PROPELLED DIESEL TELESCOPIC PLATFORMS

STANDARD FEATURES

Performance


- Deutz (or equivalent) Diesel Engine
- Fly Boom
- Easy Onboard Calibration®
- Simultaneous Commands Execution (Full proportional)
- 350° Turret Rotation
- Drive at height
- Drive speed proportional to height
- Speed / Torque Drive Selection
- Hydromotors with brake
- Drive Traction Control System
- 30% Gradability
- Proportional Joystick Controller
- Digital Control Panel (
- Platform Controls on Base
- Aluminium Basket
- Heavy Duty Solid Rubber Tires
- Orange - White Paint
- Hour Meter
- Basket Lighting
- Horn
- Rotating Beacon

Safety

- TS-EN 280 + A1 / CE Conformity
- Emergency Bypass® System
- Emergency Stop Buttons on Control Panels
- Pressure Holding and Interlocking Valves against Hose Blasts
- High Pressure Relief Valve
- Emergency Descend Hand Pump
- Descend Buzzer

OPTIONAL FEATURES

- Fly Rotation (180° Horizontal)
- Basket Rotation
- Basket Load Cell
- Extra Basket Capacity
- Steel Basket
- 70000V Insulated Fiberglass Basket
- 110V / 220V / 380V Socket in Basket
- Air Outlet on Basket
- Anemometer in Basket
- Basket Toolbox
- Continuous Turret Rotation
- Wireless Remote Controller
- Custom Paint Color
- Additional Lighting

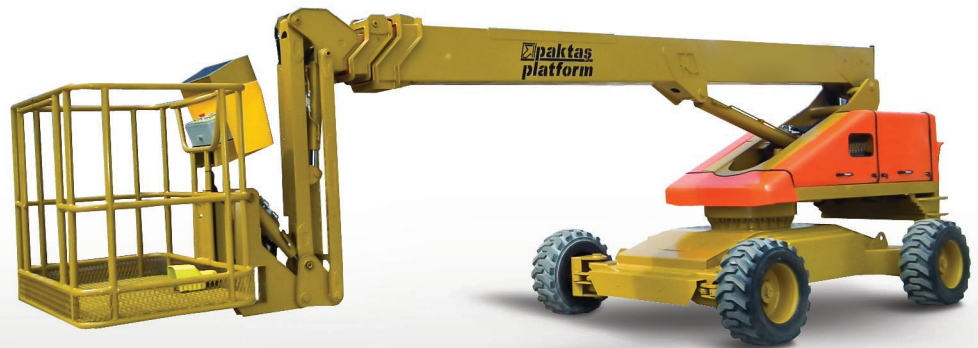

Technical Data

PTY
213F

Operating Height	21 m
Platform Height	19 m
Lateral Outreach	13 m
Turret Rotation	350°
Basket Capacity (kg / person)	250 kg
Basket Dimensions	800x1600x1100 mm
Stowed Height	2650 mm
Stowed Length	8350 mm
Stowed Width	2400 mm
Control System	Electronic Proportional Joystick
Weight	10.000 kg
Drive System	Hydromotor (4x4)

(A)
(B)
(C)

